



**Black Box Corporation**  
*The World's Source for Cabling and Network Connectivity™*




JULY 1999

36049

36051

## 4-Point Shelves – Sliding

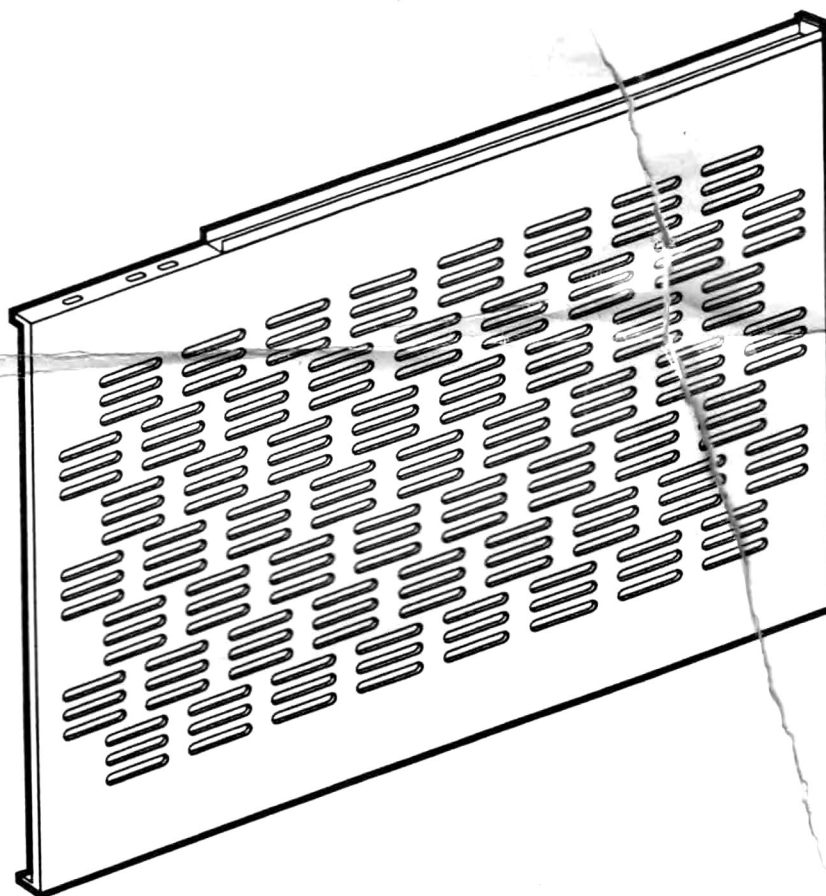

---

### CUSTOMER SUPPORT INFORMATION

Order toll-free in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)  
**FREE** technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**  
Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018  
Web site: [www.blackbox.com](http://www.blackbox.com) • E-mail: [info@blackbox.com](mailto:info@blackbox.com)


## PARTS LIST

| Item    | Component Parts              | Qty. |
|---------|------------------------------|------|
| A, B, C | Slides                       | 2    |
| D       | Shelf                        | 1    |
| E       | Front Mount Brackets         | 2    |
| F       | Rear Mount Brackets          | 2    |
| G       | Pan Head Screws #6-32 x 1/2" | 14   |
| H       | Hex Nut w/Lock Washer #6-32  | 14   |
| *       | #10-32 x 3/8" Screws         | 8    |

## ASSEMBLY INSTRUCTIONS

### STEP 1:


Remove Slide section "C" from Slide section "B" by depressing trigger "J" while extending the slide beyond the full open position.

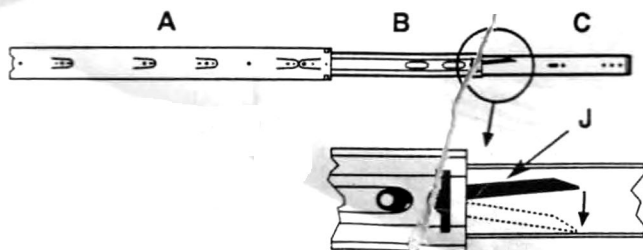

### STEP 2:

Determine the desired slide position on Shelf "D" and attach Slide section "C" using (3) Screws "G" and (3) Nuts "H" per Slide. Repeat this to the opposite side using care to maintain the same alignment.

NOTE: End of Slide section "C" that has the felt bumper "K" should face the front of the Shelf.

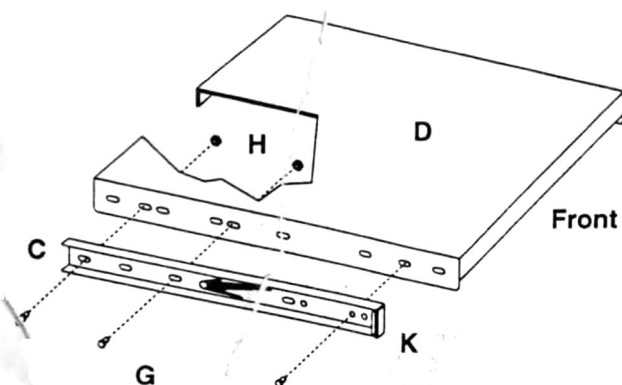

## TOOLS REQUIRED:

Phillips Screwdriver  
Wrench

### STEP 3:



Determine the desired Front Mounting Bracket "E" and Rear Mounting Bracket "F" position on Slide section "A" and attach using (2) Screws "G" and (2) Nuts "H" per Bracket.

NOTE: It may be necessary to move Slide section "B" in or out to expose the desired mounting holes in Slide section "A".

The Mounting Brackets must match the enclosure mounting rails!

Use figure 3a for enclosures with mounting rails spaced from 20 to 29 inches apart, front to rear.

Use figure 3b for enclosures with mounting rails spaced from 15 to 24 inches apart, front to rear.

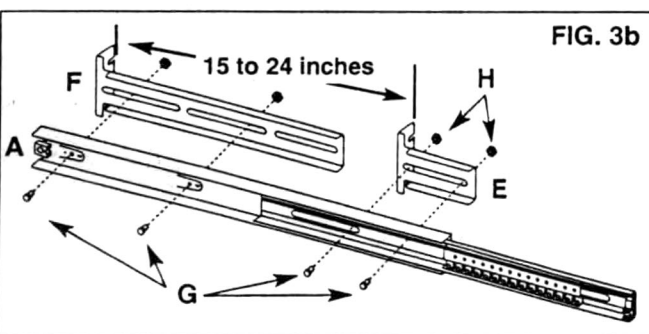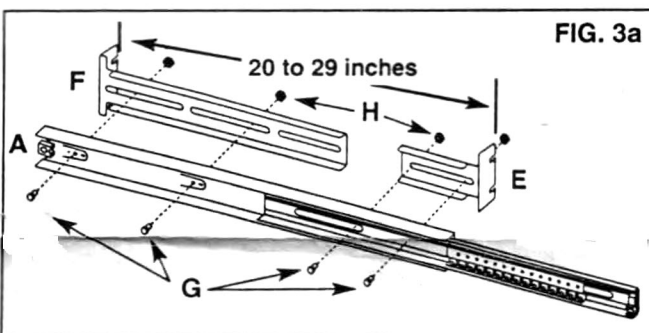

### STEP 4:

Complete the Shelf assembly by inserting Slide section "C" back into Slide section "B". The Shelf assembly is now ready for installation into the enclosure using the #10-32 x 3/8" Screws.